




# MAX-FAN PRO SERIES 250 - 1660 m<sup>3</sup>/h

## TECHNICAL DATASHEET

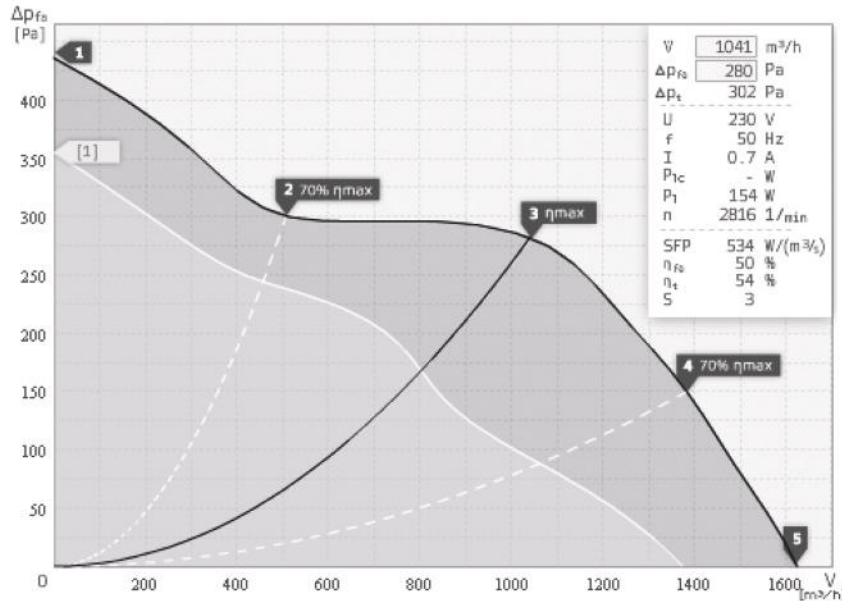

- Diagonal impeller with stator
- With Plastic housing
- With 2-step switch
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,6	0,6	0,7	0,7	0,6
Power Consumption P1	W	122	115	155	155	136
RPM n	1/min	2880	2885	2815	2818	2852
SPL inlet LWA5	dB(A)	76	74	75	73	75
SPL outlet LWA6	dB(A)	80	79	79	77	80
SPL casing break out LWA2	dB(A)	65	66	67	65	65

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	74	52	60	64	70	70	67	62	53
Outlet	LWA6	79	51	61	68	72	76	73	64	55
Casing	LWA2	66	51	56	55	65	55	52	44	34

EM 250 E2S 01   127047	
Voltage UN	230 V 1~
Current Imax	0,8
Ambient Temperature tA	60 °C
Medium Temperature tM	60 °C
Speed Control	2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

